


Distributed by


## Coupling R > ROTRANS

 Specially machined & specially balanced  
 for ROTRANS specifications : 42'000 rpm

For ROTRANS 4 to 30 contact

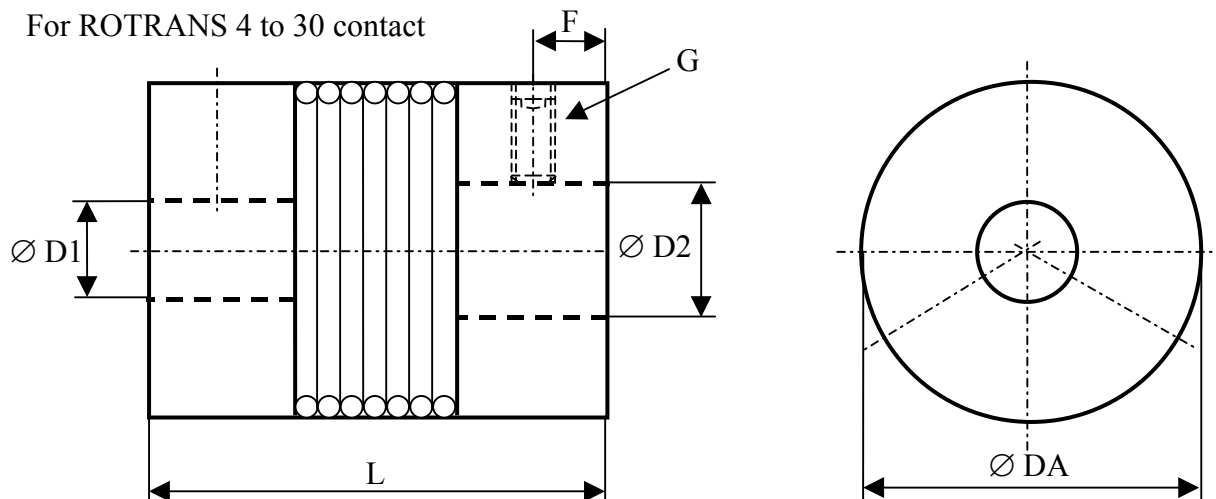

### Ordering information

Type	PN	Ø D1 / D2 H7	L	DA	F	G	Axial displacement (mm)	Radial displacement (mm)	Angular Displacement (°)	Moment of inertia gcm <sup>2</sup>		
	R15	215-D1-D2-LL	3 - 12	24	19	2	3 x M3	0.5	± 0.15	± 1.5	4.7	
			3 - 12	29	19	2	3 x M3	0.7	± 0.2	± 1.5	5.5	
		<b>215-12-12-24</b>	<b>12 - 12</b>	<b>24</b>	<b>19</b>	<b>2</b>	<b>3 x M3</b>	<b>0.5</b>	<b>± 0.15</b>	<b>± 1.5</b>	<b>4.7</b>	
<b>R20</b>		220-D1-D2-LL	3 - 16	26	25	2.5	3 x M4	0.5	± 0.15	± 1.5	15	
			3 - 16	31	25	2.5	3 x M4	0.6	± 0.2	± 1.5	18	
			3 - 16	35	25	2.5	3 x M4	0.7	± 0.25	± 2	20	
			<b>220-12-15-26</b>	<b>12 - 15</b>	<b>26</b>	<b>25</b>	<b>2.5</b>	<b>3 x M4</b>	<b>0.5</b>	<b>± 0.15</b>	<b>± 1.5</b>	<b>15</b>
			<b>**220-12-16-26</b>	<b>12 - 16</b>	<b>26</b>	<b>25</b>	<b>2.5</b>	<b>3 x M4</b>	<b>0.5</b>	<b>± 0.15</b>	<b>± 1.5</b>	<b>15</b>
		<b>220-12-15-31</b>	<b>12 - 15</b>	<b>31</b>	<b>25</b>	<b>2.5</b>	<b>3 x M4</b>	<b>0.6</b>	<b>± 0.2</b>	<b>± 1.5</b>	<b>18</b>	
<b>R45</b>		245-D1-D2-LL	6 - 22	37	32	3.5	3 x M5	0.7	± 0.2	± 1.5	65	
			6 - 22	45	32	3.5	3 x M5	1	± 0.25	± 2	70	
<b>R50</b>		250-D1-D2-LL	6 - 28	43	40	4	3 x M6	1	± 0.2	± 1.5	180	
			6 - 28	53	40	4	3 x M6	1.2	± 0.3	± 2	220	

 Delivery time : XXX-XX-XX-XX : from stock / price level 1

XXX-XX-XX-XX : 3 working weeks after receipt order / price level 2 (higher)

\*\* till end of the stock and after XXX-XX-XX-XX conditions



Due to the continual development of our products, the specification may be modified without forewarning.